



CE LVD TEST REPORT

For
LED DESIGNER TABLE LAMP

Model No.: VT-7026,VT-7048,VT-7096,VT-7204,VT-7353,VT-7312

Applicant : V-TAC EXPORTS LIMITED
ROOM NO.301, KAM ON BUILDING 176A QUEENS ROAD CENTRAL,
CENTRAL, HONGKONG

Manufacturer : V-TAC EXPORTS LIMITED
ROOM NO.301, KAM ON BUILDING 176A QUEENS ROAD CENTRAL,
CENTRAL, HONGKONG

Issued By : Global-Standard Testing Service Co., Ltd.
Room 1505, Building B, Chuangxin Plaza, Pingshan Avenue,
Pingshan District, Shenzhen, China



Tel : +86 755 33863599

Email : market@gstslab.com

Report Number : GST.190428.A004S

Issued Date : May 08, 2019

Date of Report : May 08, 2019

Note:

1. The test data and result is based on the tested sample only.
2. Please verify information in the report on GST web: www.gstslab.com through report number.
3. All rights reserve, the pirate edition investigates necessarily! This report shall not be reproduced unless under the authority of Global-Standard Testing Service Co., Ltd.

LVD Report EN60598-1 Luminaires—Part 1 :General requirements and tests EN60598-2-4 Part 2-4:Particular requirments Section 4 – portable general purpose luminaires	
Report reference No.:	GST.190428.A004S
Testing laboratory	Global-Standard Testing Service Co., Ltd.
Location.....:	Room 1505, Building B, Chuangxin Plaza, Pingshan Avenue, Pingshan District, Shenzhen, China
Applicant.....:	V-TAC EXPORTS LIMITED
Address:.....:	ROOM NO.301, KAM ON BUILDING 176A QUEENS ROAD CENTRAL, CENTRAL, HONGKONG
Manufacturer.....:	V-TAC EXPORTS LIMITED
Address:.....:	ROOM NO.301, KAM ON BUILDING 176A QUEENS ROAD CENTRAL, CENTRAL, HONGKONG
Standards.....:	EN 60598-1: 2015+A1:2018 EN 60598-2-4: 2018 EN 62031: 2008+A1:2013+A2:2015 EN 62471: 2008 EN 62493: 2015
Procedure deviation.....:	N/A
Non-standard test method.....:	N/A
Type of test equipment	LED DESIGNER TABLE LAMP
Trade mark.....:	 N/A
Model/Type designation.....:	VT-7026,VT-7048,VT-7096,VT-7204,VT-7353,VT-7312
Rating.....:	AC100-240V, 50/60Hz, Max.25W
TRF originator.....:	Global-Standard Testing Service Co., Ltd.
Test item particulars.....:	--
Operating Condition.....:	Continuous
Tested for IT power systems.....:	N/A
IT testing, phase-phase voltage (V)....:	N/A.
Class of equipment.....:	Class II equipment
Protection against ingress of water.....:	IP20

Possible test case verdicts :	
test case does not apply to the test object	N(/A.)
test object does meet the requirement	P(ass)
test object does not meet the requirement	F(ail)

Name and address of the testing laboratory :

Global-Standard Testing Service Co., Ltd.
 Room 1911-1914, Noble Plaza, Qian Jin 1st Road, Bao An
 District, Shenzhen, Guangdong, China.

Tested by : John Huang May 04, 2019
 Signature Date

John Huang / Engineer
 Name/title

Reviewed by : Gloria Wang May 08, 2019
 Signature Date

Gloria Wang / Project Engineer
 Name/title


Approved by : Nico Xie May 08, 2019
 Signature Date



Nico Xie / Manager
 Name/title

General remarks:	
<p>Clause number between brackets refer to clauses in IEC 60598-1</p> <p>"(see remark #)" refers to a remark appended to the report.</p> <p>"(see appended table)" refers to a table appended to the report.</p> <p>Throughout this report a comma is used as the decimal separator.</p> <p>The test results presented in this report relate only to the object tested.</p> <p>This report shall not be reproduced except in full without the written approval of the testing laboratory.</p> <p>Unless otherwise specified, test are made under normal conditions at an ambient temperature within the range of 15°C to 35°C, RH45% to 75% and an air pressure of 860mbar of 1060mbar</p>	<p>Attachment with:</p> <p>1) Photo documentation</p>
<p>1. The test samples were pre-production samples without serial numbers. This report shall not be reproduced except in full without the written approval of the testing laboratory.</p> <p>2. The standard of LED modules for general lighting was evaluated with reference to EN 62031;</p> <p>3. The standard of EN 62471 and EN 62493 have been considered with positive result in this report.</p>	

Label

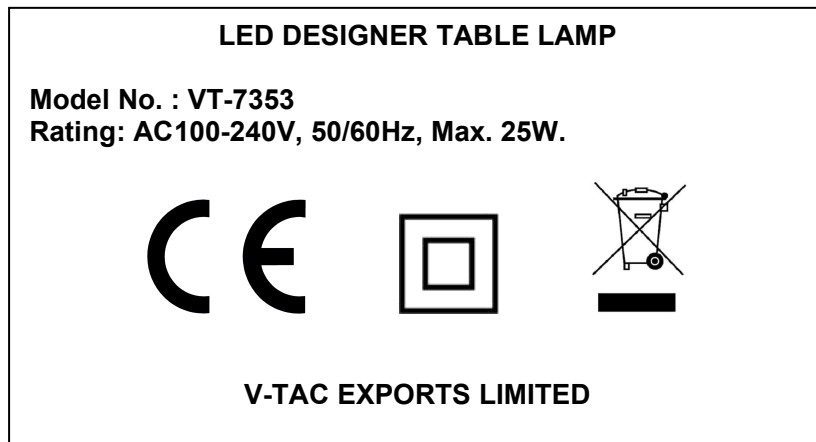

Note:

1. Due to similarity of the labels, only above label was listed.
2. All models have the same marking plate except the model name and input rating with wattage.
3. The height of WEEE directive mark is at least 7mm, and others directive mark are at least 5mm height.

S

EN 60598-2-4			
Clause	Requirement - Test	Result – Remark	Verdict
4.1 (0)	SCOPE		P
4.1 (0.1)	More sections applicable..... :		N/A
	Rated voltage not exceeding 250 V		P

4.4 (2)	CLASSIFICATION		P
4.4 (2.2)	Type of protection..... :	Class II	P
4.4 (2.3)	Degree of protection..... :	IP20	N/A
4.4 (2.4)	Portable or handheld luminaire	Portable luminaire	P
	Fixed luminaire suitable for normally flammable surfaces..... :		N/A
	Fixed luminaire suitable for non-combustible materials only		N/A
4.4 (2.5)	Luminaire for normal use		P
	Luminaire for rough service		N/A

4.5 (3)	MARKING		P
4.5 (3.2)	Mandatory markings	See marking	P
	Position of the marking	Sticking on the enclosure of product	P
	Format of symbols/text		P
4.5 (3.2.1)	Mark of origin		N/A
4.5 (3.2.2)	Rated voltage(s) in volts	See marking	P
4.5 (3.2.3)	Rated max. ta, if other than 25 °C		N/A
4.5 (3.2.4)	Symbol for class II luminaires		N/A
4.5 (3.2.5)	Symbol for class III luminaires		N/A
4.5 (3.2.6)	Marking (if applicable) with IP number	IP20	N/A
4.5 (3.2.7)	Maker's model number or type reference		P
4.5 (3.2.8)	Rated wattage	See marking	P
4.5 (3.2.9)	suitability or non-suitability for mounting on normally flammable surface		N/A
4.5 (3.2.10)	Information concerning special lamp		N/A
4.5 (3.2.11)	Symbol for 'cool beam'		N/A
4.5 (3.2.12)	Except for type Z attachments, terminations shall be clearly marked		N/A
	Information for luminaires with non-detachable flexible cable not fitted with a plug		N/A

S

EN 60598-2-4			
Clause	Requirement - Test	Result – Remark	Verdict
	ELV d.c. supplied fluorescent luminaires		N/A
4.5 (3.2.13)	Symbol for minimum distance		N/A
	Explanation for its meaning in instructions		N/A
4.5 (3.2.14)	Symbol for rough service luminaires		N/A
4.5 (3.2.15)	Symbol for luminaires with bowl mirror lamp		N/A
4.5 (3.2.16)	Luminaires with glass protective shield		N/A
4.5 (3.2.17)	Interconnected luminaires		N/A
4.5 (3.2.18)	Warning for luminares with ignitors		N/A
4.5 (3.2.19)	Symbol for luminaires designed for use with self-shielded tungsten halogen lamps only		N/A
4.5 (3.3)	Additional information		P
	Language of instructions	English	P
4.5 (3.3.1)	Combination luminaires		N/A
4.5 (3.3.2)	Nominal frequency in Hz	See marking	P
4.5 (3.3.3)	Operating temperature		N/A
4.5 (3.3.4)	Symbol or warning notice		N/A
4.5 (3.3.5)	Wiring diagram		N/A
4.5 (3.3.6)	Special conditions		N/A
4.5 (3.3.7)	Metal halid lamp luminaire – warning		N/A
4.5 (3.3.8)	Limitation for semi-luminaires		N/A
4.5 (3.3.9)	Power factor and supply current		N/A
4.5(3.3.10)	Suitability for use indoors		N/A
4.5 (3.3.11)	Luminaires with remote control		N/A
4.5 (3.3.12)	Clip-mounted luminaire - warning		N/A
4.5 (3.3.13)	Specifications of protective shields		N/A
4.5 (3.3.14)	Symbol for nature of supply		N/A
4.5 (3.3.15)	Rated current of socket outlet		N/A
4.5 (3.3.16)	Rough service luminaire		N/A
4.5 (3.3.17)	Mounting instruction for type Y, type Z and some type X attachments		N/A
4.5 (3.3.18)	Non-ordinary luminaires with PVC cable		N/A
3.3.101	If no terminal block is provided with the luminaire, the packaging needs to contain the warning: "Terminal block not included. Installation may require advice from a qualified person"		N/A

S

EN 60598-2-4			
Clause	Requirement - Test	Result – Remark	Verdict
4.5 (3.4)	Test with water		P
	Test with hexane		P
	Legible after test		P
	Label attached		P

4.6 (4)	CONSTRUCTION		P
4.6.1 (-)	Insulation not damaged when placing on support		P
4.6.2 (-)	Wiring fixed, to avoid rubbing		P
4.6.3 (-)	Stability 6°		P
4.6.4 (-)	Candlestick luminaires with switch		N/A
4.6.5 (-)	E5 lampholders		N/A
4.6 (4.2)	Components replaceable without difficulty		N/A
4.6 (4.3)	Wireways smooth and free from sharp edges		P
4.6 (4.4)	Lampholders		N/A
4.6 (4.4.1)	Integral lampholder		N/A
4.6 (4.4.2)	Wiring connection		N/A
4.6 (4.4.3)	Lampholder for end-to-end mounting		N/A
4.6 (4.4.4)	Positioning		N/A
4.6 (4.4.5)	Peak pulse voltage		N/A
4.6 (4.4.6)	Centre contact		N/A
4.6 (4.4.7)	Rough service luminaires		N/A
4.6 (4.4.8)	Lamp connectors		N/A
4.6 (4.5)	Starter holders		N/A
	Starter holder in luminaires other than class II		N/A
	Starter holder class II construction		N/A
4.6 (4.6)	Terminal blocks		N/A
	Tails		N/A
	Unsecured blocks		N/A
4.6 (4.7)	Terminals and supply connections		N/A
4.6 (4.7.1)	Contact to metal parts		N/A
4.6 (4.7.2)	Test 8 mm live conductor		N/A
	Test 8 mm earth conductor		N/A
4.6 (4.7.3)	Terminals for supply conductors		N/A
4.6 (4.7.4)	Terminals other than supply connection		N/A

S

EN 60598-2-4			
Clause	Requirement - Test	Result – Remark	Verdict
4.6 (4.7.5)	Heat-resistant wiring/sleeves		N/A
4.6 (4.7.6)	Multi-pole plug		N/A
4.6 (4.8)	Switches:		P
	- adequate rating		P
	- adequate fixing		N/A
	- polarized supply		N/A
4.6 (4.9)	Insulating lining and sleeves		P
4.6 (4.9.1)	Retainment		P
	Method of fixing.....:		P
4.6 (4.9.2)	Insulated linings and sleeves		N/A
	a) & c) Insulation resistance and electric strength		N/A
	b) Ageing test. Temperature (°C).....:		N/A
4.6 (4.10)	Insulation of Class II luminaires		P
4.6 (4.10.1)	No contact, mounting surface - accessible metal parts - wiring of basic insulation		P
	Safe installation fixed luminaires		P
	Capacitors		N/A
	Interference suppression capacitors according to IEC 60384-14		N/A
4.6 (4.10.2)	Assembly gaps:		N/A
	- not coincidental		N/A
	- no straight access with test probe		N/A
4.6 (4.10.3)	Retainment of insulation:		P
	- fixed		P
	- unable to be replaced; luminaire inoperative		P
	- sleeves retained in position		P
	- lining in lampholder		P
4.6 (4.11)	Electrical connections		N/A
4.6 (4.11.1)	Contact pressure		N/A
4.6 (4.11.2)	Screws:		N/A
	- self-tapping screws		N/A
	- thread-cutting screws		N/A

S

EN 60598-2-4			
Clause	Requirement - Test	Result – Remark	Verdict
	- at least two self-tapping screws		N/A
4.6 (4.11.3)	Screw locking:		N/A
	- spring washer		N/A
	- rivets		N/A
4.6 (4.11.4)	Material of current-carrying parts		N/A
4.6 (4.11.5)	No contact to wood		N/A
4.6 (4.11.6)	Electro-mechanical contact systems		N/A
4.6 (4.12)	Mechanical connections and glands		N/A
4.6 (4.12.1)	Screws not made of soft metal		N/A
	Screws of insulating material		N/A
	Torque test: torque (Nm); part..... :		N/A
4.6 (4.12.2)	Screws with diameter < 3 mm screwed into metal		N/A
4.6 (4.12.4)	Locked connections:		N/A
	- fixed arms; torque (Nm)..... :		N/A
	- lampholder; torque (Nm)..... :		N/A
	- push-button switches; torque 0,8 Nm..... :		N/A
4.6 (4.12.5)	Screwed glands; force (N)..... :		N/A
4.6 (4.13)	Mechanical strength		P
4.6 (4.13.1)	Impact tests:		P
	- fragile parts; energy (Nm)..... :		N/A
	- other parts; energy (Nm)..... :	0.5Nm	P
	1) live parts		P
	2) linings		P
	3) protection		P
	4) covers		P
4.6 (4.13.3)	Straight test finger		N/A
4.6 (4.13.4)	Rough service luminaires		N/A

S

EN 60598-2-4			
Clause	Requirement - Test	Result – Remark	Verdict
	a) fixed		N/A
	b) hand-held		N/A
	c) delivered with a stand		N/A
	d) for temporary installations and suitable for mounting on a stand		N/A
4.6 (4.13.6)	Tumbling barrel		N/A
4.6 (4.14)	Suspensions and adjusting devices		N/A
4.6 (4.14.1)	Mechanical load:		N/A
	A) four times the weight		N/A
	B) torque 2,5 Nm		N/A
	C) bracket arm; bending moment (Nm).....:		N/A
	D) load track- mounted luminaires		N/A
	E) clip-mounted luminaires, glass-shelve. Thickness (mm).....:		N/A
	metal rod. diameter (mm).....:		N/A
4.6 (4.14.2)	Load to flexible cables		N/A
	Mass (kg).....:		N/A
	Stress in conductors (N/mm ²).....:		N/A
	Mass (kg) of semi-luminaire.....:		N/A
	Bending moment (Nm) of semi-luminaire.....:		N/A
4.6 (4.14.3)	Adjusting devices:		N/A
	- flexing test; number of cycles.....:		N/A
	- strands broken		N/A
	- electric strength test afterwards		N/A
4.6 (4.14.4)	Telescopic tubes: cords not fixed to tube; no strain on conductors		N/A
4.6 (4.14.5)	Guide pulleys		N/A
4.6 (4.14.6)	Strain on socket-outlets		N/A
4.6 (4.15)	Flammable materials:		N/A
	- glow-wire test 650 °C		N/A
	- spacing ≥ 30 mm		N/A

S

EN 60598-2-4			
Clause	Requirement - Test	Result – Remark	Verdict
	- screen withstanding test of 13.3.1		N/A
	- screen dimensions		N/A
	- no fiercely burning material		N/A
	- thermal protection		N/A
	- electronic circuits exempted		N/A
4.6 (4.15.2)	Luminaires made of thermoplastic material with lamp control gear		P
	a) construction		P
	b) temperature sensing control		N/A
	c) surface temperature		P
4.6 (4.16)	Luminaires suitable for normally flammable surfaces		N/A
	No lamp control gear		N/A
4.6 (4.16.1)	Lamp control gear spacing:		N/A
	- spacing 35 mm		N/A
	- spacing 10 mm		N/A
4.6 (4.16.2)	Thermal protection:		N/A
	- in lamp control gear		N/A
	- external		N/A
	- fixed position		N/A
	- temperature marked lamp control gear		N/A
4.6 (4.16.3)	Luminaires suitable for normally flammable surfaces measured		N/A
4.6 (4.17)	Drain holes		N/A
	Clearance at least 5 mm		N/A
4.6 (4.18)	Resistance to corrosion:		P
4.6 (4.18.1)	- rust-resistance		P
4.6 (4.18.2)	- season cracking in copper		N/A
4.6 (4.18.3)	- corrosion of aluminium		N/A
4.6 (4.19)	Ignitors compatible with ballast		N/A
4.6 (4.20)	Rough service vibration		N/A
4.6 (4.21)	Protective shield:		N/A

S

EN 60598-2-4			
Clause	Requirement - Test	Result – Remark	Verdict
4.6 (4.21.1)	Shield fitted		N/A
4.6 (4.21.2)	Particles from a shattering lamp not impair safety		N/A
4.6 (4.21.3)	No direct path		N/A
4.6 (4.21.4)	Impact test on shield		N/A
	Glow-wire test on lamp compartment		N/A
4.6 (4.22)	Attachments to lamps		N/A
4.6 (4.23)	Semi-luminaires comply Class II		N/A
4.6 (4.24)	UV radiation, metal halide lamps		N/A
4.6 (4.25)	No sharp point or edges		P
4.6 (4.26)	Short-circuit protection:		N/A
4.6 (4.26.1)	Uninsulated accessible SELV parts		N/A
4.6 (4.26.2)	Short-circuit test		N/A
4.6 (4.26.3)	Test chain according to IEC 61032		N/A

4.7 (11)	CREEPAGE DISTANCES AND CLEARANCES		P
	Working voltage (V).....:	240VAC	-
	Voltage form	Sinusoidal	-
	PTI	< 600 [×] ≥ 600 []	-
	Rated pulse voltage (kV).....:		-
	(1) Current-carrying parts of different polarity: cr (mm); cl (mm) 2,5/1,7.....:		P
	(2) Current-carrying parts and accessible parts: cr (mm); cl (mm)		P
	(3) Parts becoming live due to breakdown of basic insulation and metal parts: cr (mm); cl (mm).....:		P
	(4) Outer surface of cable where it is clamped and metal parts: cr (mm); cl (mm)3.6/3.6.....:		P
	(5) Current-carrying parts of switches and metal parts, after removal of insulation: cr (mm); cl (mm).....:		N/A

S

EN 60598-2-4			
Clause	Requirement - Test	Result – Remark	Verdict

	(6) Current-carrying parts and supporting surface: cr (mm); cl (mm) 5.0/3.0..... :		P
--	---	--	---

4.8 (7)	PROVISION FOR EARTHING		N/A
4.8 (7.2.1 + 7.2.3)	Accessible metal parts		N/A
	Metal parts in contact with supporting surface		N/A
	Resistance < 0,5 Ω		N/A
	Two self-tapping screws used		N/A
	Thread-forming screws		N/A
	Connector earthing first		N/A
4.8 (7.2.2 + 7.2.3)	Earth continuity in joints etc.		N/A
4.8 (7.2.4)	Locking of clamping means		N/A
	Compliance with 4.7.3		N/A
4.8 (7.2.5)	Earth terminal integral part of connector socket		N/A
4.8 (7.2.6)	Earth terminal adjacent to mains terminals		N/A
4.8 (7.2.7)	Electrolytic corrosion of the earth terminal		N/A
4.8 (7.2.8)	Material of earth terminal		N/A
	Contact surface bare metal		N/A
4.8 (7.2.10)	Class II luminaire for looping-in		N/A
4.8 (7.2.11)	Earthing core coloured green-yellow		N/A
	Length of earth conductor		N/A

4.9 (14)	SCREW TERMINALS		N/A
	Separately approved; component list		N/A
	Part of the luminaire		N/A

4.9 (15)	SCREWLESS TERMINALS		N/A
	Separately approved; component list		N/A
	Part of the luminaire		N/A

4.10 (5)	EXTERNAL AND INTERNAL WIRING		P
----------	------------------------------	--	---

S

EN 60598-2-4			
Clause	Requirement - Test	Result – Remark	Verdict
4.10 (5.2)	Supply connection and external wiring		N/A
4.10 (5.2.1)	Means of connection.....:		N/A
4.10 (5.2.2)	Type of cable.....:		N/A
	Nominal cross-sectional area (mm ²).....:		N/A
4.10 (5.2.3)	Type of attachment, X, Y or Z		N/A
4.10 (5.2.5)	Type Z not connected to screws		N/A
4.10 (5.2.6)	Cable entries		N/A
	- suitable for introduction		N/A
	- adequate degree of protection		N/A
4.10 (5.2.7)	Cable entries through rigid material have rounded edges		N/A
4.10 (5.2.8)	Insulating bushings:		N/A
	- suitably fixed		N/A
	- material in bushings		N/A
	- tubes or guards made of insulating material		N/A
4.10 (5.2.9)	Locking of screwed bushings		N/A
4.10 (5.2.10)	Cord anchorage:		N/A
	- covering protected from abrasion		N/A
	- clear how to be effective		N/A
	- no mechanical or thermal stress		N/A
	- no tying of cables into knots etc.		N/A
	- insulating material or lining		N/A
4.10 (5.2.10.1)	Cord anchorage for type X attachment:		N/A
	a) at least one part fixed		N/A
	b) types of cable		N/A
	c) no damaging of the cable		N/A
	d) whole cable can be mounted		N/A
	e) no touching of clamping screws		N/A

S

EN 60598-2-4			
Clause	Requirement - Test	Result – Remark	Verdict
	f) metal screw not directly on cable		N/A
	g) replacement without special tool		N/A
	Glands not used as anchorage		N/A
	Labyrinth type anchorages		N/A
4.10 (5.2.10.2)	Adequate cord anchorage for type Y and type Z attachment	type Y	N/A
4.10 (5.2.10.3)	Tests:		N/A
	- impossible to push cable; unsafe		N/A
	- pull test: 25 times; pull (N).....:		N/A
	- torque test: torque (Nm).....:		N/A
	- displacement ≤ 2 mm		N/A
	- no movement of conductors		N/A
	- no damage of cable or cord		N/A
4.10 (5.2.11)	External wiring passing into luminaire		N/A
4.10 (5.2.12)	Looping-in terminals		N/A
4.10 (5.2.13)	Wire ends not tinned		N/A
	Wire ends tinned: no cold flow		N/A
4.10 (5.2.14)	Mains plug same protection		N/A
	Class III luminaire plug		N/A
4.10 (5.2.15)	Colour code low voltage		N/A
4.10 (5.2.16)	Appliance inlets (IEC 60320)		N/A
	Appliance couplers of class II type		N/A
4.10 (5.3)	Internal wiring		P
4.10 (5.3.1)	Cross-sectional area (mm ²).....:	0.75mm ²	P
	Insulation thickness	0.6mm	P
	Temperature resistant		P
	Sleeves suitable for hot spots		P
	Green-yellow for earth only		N/A
	Through wiring		N/A

S

EN 60598-2-4			
Clause	Requirement - Test	Result – Remark	Verdict
	- cross-sectional area (mm ²)..... :		N/A
	- not delivered/ mounting instruction		N/A
	- factory assembled		N/A
	- socket outlet loaded (A)..... :		N/A
	- temperatures..... :		N/A
4.10 (5.3.2)	Sharp edges etc.		P
	No moving parts of switches etc.		N/A
	Joints, raising/lowering devices		N/A
	Telescopic tubes etc.		N/A
	No twisting over 360°		P
4.10 (5.3.3)	Openings		N/A
	Bushings not removable		N/A
	Bushings in sharp openings		N/A
	Cables with protective sheath		N/A
4.10 (5.3.4)	Joints and junctions effectively insulated		P
4.10 (5.3.5)	Strain on internal wiring		P
4.10 (5.3.6)	Wire carriers		N/A
4.10 (5.3.7)	Wire ends not tinned		N/A
	Wire ends tinned: no cold flow		N/A

4.11 (8)	PROTECTION AGAINST ELECTRIC SHOCK		P
4.11.1 (-)	Luminaires with BC cap		N/A
4.11 (8.2.1)	Live parts not accessible		P
	Protection in any position		P
	Double-ended tungsten filament lamp		N/A
	Insulation lacquer not reliable		N/A
	Double-ended high pressure discharge lamp		N/A
4.11 (8.2.2)	Portable luminaire adjusted in most unfavourable position		N/A

S

EN 60598-2-4			
Clause	Requirement - Test	Result – Remark	Verdict
4.11 (8.2.3)	Class II luminaire:		N/A
	- basic insulated metal parts not accessible during starter or lamp replacement		N/A
	- basic insulation not accessible other than during starter or lamp replacement		N/A
	- glass protective shields not used as supplementary insulation		N/A
	Class I luminaire with BC lampholder		N/A
4.11 (8.2.4)	Portable luminaire:		P
	- protection independent of supporting surface		P
	- terminal block completely covered		N/A
4.11 (8.2.6)	Covers reliably secured		N/A
4.11 (8.2.7)	Discharging of capacitors $\geq 0,5 \mu\text{F}$		N/A
	Portable plug connected luminaire with capacitor		N/A
	Other plug connected luminaire with capacitor		N/A
	Discharge device on or within capacitor		N/A
	Discharge device mounted separately		N/A

4.12 (12)	ENDURANCE TEST AND THERMAL TEST		P
4.12 (12.3)	Endurance test:		P
	- mounting- position.....: Normal position		P
	- test temperature (°C).....: 35°C		P
	- total duration (h).....: 240h		P
	- supply voltage: Un factor; calculated voltage (V).....:		P
	- lamp used.....:		P
4.12 (12.3.2)	After endurance test:		P
	- no part unserviceable		P
	- luminaire not unsafe		P
	- no damage to track system		N/A
	- marking legible		P
	- no cracks, deformation etc.		P

S

EN 60598-2-4			
Clause	Requirement - Test	Result – Remark	Verdict
4.12 (12.4)	Thermal test (normal operation)		P
4.12 (12.5)	Thermal test (abnormal operation)		N/A
4.12 (-)	Test overturned position (overturns < 15°)		N/A
4.12 (12.6)	Thermal test (failed lamp control gear condition):		N/A
4.12 (12.6.1)	- case of abnormal conditions..... :		N/A
	- electronic lamp control gear		N/A
	- measured winding temperature (°C): at 1,1 Un :		N/A
	- measured mounting surface temperature (°C): at 1,1 Un..... :		N/A
	- calculated mounting surface temperature (°C) :		N/A
	- track-mounted luminaires		N/A
4.12 (12.6.2)	Temperature sensing control		N/A
	- case of abnormal conditions..... :		N/A
	- thermal link		N/A
	- manual reset cut-out		N/A
	- auto reset cut-out		N/A
	- measured mounting surface temperature (°C)::		N/A
	- track-mounted luminaires		N/A
4.12 (12.7)	Thermal test:		P
	- case of abnormal conditions		P
4.12 (12.7.1)	- measured winding temperature (°C): at 1,1 Un :		P
	- measured temperature of fixing point/ exposed part (°C): at 1,1 Un..... :		P
	- calculated temperature of fixing point/ exposed part (°C)..... :		N/A
4.12 (12.7.2)	Temperature sensing control		N/A
	- thermal link		N/A
	- manual reset cut-out		N/A
	- auto reset cut-out		N/A
	- measured temperature of fixing point/ exposed part (°C):		N/A
4.13 (9)	RESISTANCE TO DUST, SOLID OBJECTS AND MOISTURE		P

S

EN 60598-2-4			
Clause	Requirement - Test	Result – Remark	Verdict
4.13 (9.2)	Tests for ingress of dust, solid objects and moisture:		P
	- classification according to IP.....:	IP20	P
	- mounting position during test.....:		N/A
	- fixing screws tightened; torque (Nm).....:		N/A
	- tests according to clauses.....:		N/A
	- electric strength test afterwards		N/A
	a) no deposit in dust-proof luminaire		N/A
	b) no talcum in dust-tight luminaire		N/A
	c) no trace of water on current-carrying parts or where it could become a hazard		N/A
	d) i) For luminaires without drain holes – no water entry		N/A
	d) ii) For luminaires with drain holes – no hazardous water entry		N/A
	e) no water in watertight luminaire		N/A
	f) no contact with live parts (IP 2X)		P
	f) no entry into enclosure (IP 3X and IP 4X)		N/A
4.13 (9.3)	Humidity test 48 h		P

4.14 (10)	INSULATION RESISTANCE AND ELECTRIC STRENGTH		P
4.14 (10.2.1)	Insulation resistance test		P
	Insulation resistance (MΩ):		N/A
	SELV:		N/A
	- between current-carrying parts of different polarity.....:		N/A
	- between current-carrying parts and mounting surface.....:		N/A
	- between current-carrying parts and metal parts of the luminaire.....:		N/A
	Other than SELV:		P
	- between live parts of different polarity.....:	>3MΩ	P
	- between live parts and mounting surface.....:	100 MΩ	P
	- between live parts and metal parts.....:	100 MΩ	P
	- between live parts of different polarity through action of a switch.....:		N/A

S

EN 60598-2-4			
Clause	Requirement - Test	Result – Remark	Verdict
4.14 (10.2.2)	Electric strength test		N/A
	Dummy lamp		N/A
	Luminaires with ignitors after 24 h test		N/A
	Luminaires with manual ignitors		N/A
	Test voltage (V):		N/A
	SELV:		N/A
	- between current-carrying parts of different polarity.....:		N/A
	- between current-carrying parts and mounting surface.....:	500V	N/A
	- between current-carrying parts and metal parts of the luminaire.....:	500V	N/A
	Other than SELV:		P
	- between live parts of different polarity.....:	1440V	P
	- between live parts and mounting surface.....:	2880V	P
	- between live parts and metal parts.....:	2880V	P
	- between live parts of different polarity through action of a switch.....:		N/A
4.14 (10.3.1)	Leakage current (mA).....:	0.01mA	P

4.15 (13)	RESISTANCE TO HEAT, FIRE AND TRACKING		N/A
4.15 (13.2.1)	Ball-pressure test:		N/A
	- part tested; temperature (°C).....:		N/A
	- part tested; temperature (°C).....:		N/A
4.15 (13.3.1)	Needle flame test (10 s):		N/A
	- part tested.....:		N/A
	- part tested.....:		N/A
4.15 (13.3.2)	Glow-wire test (650°C):		N/A
	- part tested.....:		N/A
	- part tested.....:		N/A
	- part tested.....:		N/A

S

EN 60598-2-4			
Clause	Requirement - Test	Result – Remark	Verdict
4.15 (13.4.1)	Tracking test: part tested..... :		N/A

	COMMON MODIFICATIONS (including A11 and A12 to EN 60598-1:2000)		N/A
(3.3.101 + 5.2.1)	For luminaires connected by tails, information about terminal block		N/A
4.10 (5.2.1) (EN 60598 -1:2000/ A12: 2002)	Connecting leads (tail): account shall be taken of national installation rules/practice when deciding whether to supply a connection device or not.		N/A
(5.2.2)	Cables equal to HD 21 S2 or HD 22 S2		N/A
(5.2.15)	Colour code low voltage		N/A
C (EN 60598: 2000/A11)	ANNEX C, ABNORMAL CIRCUIT CONDITIONS (For metal halide lamps and high-pressure sodium vapour lamps.)		N/A
	Item b) and Figure C.3 replaced		N/A

ZB	ANNEX ZB, SPECIAL NATIONAL CONDITIONS		N/A
(2.2)	Class 0 not accepted		N/A
4.4 (2.2)	PL: class 0 and class I not permitted on portable luminaires		N/A
(3.3)	DK: power supply cord with label		N/A
	IT: warning label on Class 0 luminaire		N/A
(4.5.1)	DK: socket- outlets		N/A
(4.5.1)	FR: socket-outlets		N/A
(5.2.1)	DK, FI, SE, GB: type of plug		N/A

ZC	ANNEX ZC, NATIONAL DEVIATIONS		N/A
(13.3)	DK: Needle flame test or glow-wire test 750 °C for luminaires in access routes		N/A
(13.3)	GB: Requirements according to United Kingdom Building Regulation		N/A
(13.3.2)	FR: Glow-wire test 850 °C alt. 750 °C for luminaires in premises open to public and workers		N/A

S

TABLE		List of critical components and materials		
Component	manufacturers / trademark	Type / model	Value / rating	Approval/ Reference
Dirver	TEKA	TEKA036-2571000EU	Input: 100-24VAC, Max.1.2A. Output: DC25.7V, 1A, Ta: 40°C,	TUV
LED	Various	Various	2835, 3.5V	-
PCB	Various	Various	V-0, 130°C	UL

S

EN 60598-2-4							
Clause	Requirement - Test			Result – Remark			Verdict
	ANNEX 2: TEMPERATURE MEASUREMENTS, THERMAL TESTS OF SECTION 12						P
	Type reference.....			VT-7353		--	
	Lamp used.....			As in normal use		--	
	Mounting position of luminaire.....			As in normal use		--	
	Supply wattage (W).....			24.8W		--	
	Supply current (A).....			0.153A		--	
	Calculated power factor.....			--		--	
	Table: measured temperatures corrected for ta = 25 °C:						--
	- abnormal operating mode.....			--		--	
	- test 1: 1,06 times rated voltage or 1,05 times rated wattage.....			Supplied from adapter 1.06x240V=264.4V		--	
	- test 2: 1,1 times rated voltage or 1,05 times rated wattage.....			--		--	
	- test 3: 1,1 times rated voltage or 1,05 times rated wattage.....			--		--	
	- test 4: 1,1 times rated voltage or 1,05 times rated wattage.....			--		--	
	- test 5: 1,1 times rated voltage or 1,05 times rated wattage.....			--		--	
temperature (°C) of part	clause 12.4 – normal		clause 12.5 – abnormal				
	test 1	Limits	test 2	test 3	test 4	test 5	Limits
Diffuser	32.2	90					
Tc	52.8	90					
Lighted object (0,1m)	33.9	90					
Mounting surface	26.1	90					
Ambient	25.6	--					

S

EN 60598-2-4			
Clause	Requirement - Test	Result – Remark	Verdict
	ANNEX 3: SCREW TERMINALS (PART OF THE LUMINAIRE)		N/A
(14)	SCREW TERMINALS		N/A
(14.2)	Type of terminal..... :		N/A
	Rated current (A)..... :		N/A
(14.3.2.1)	One or more conductors		N/A
(14.3.2.2)	Special preparation		N/A
(14.3.2.3)	Terminal size		N/A
	Cross-sectional area (mm ²)..... :		N/A
(14.3.3)	Conductor space (mm)..... :		N/A
(14.4)	Mechanical tests		N/A
(14.4.1)	Minimum distance		N/A
(14.4.2)	Cannot slip out		N/A
(14.4.3)	Special preparation		N/A
(14.4.4)	Nominal diameter of thread (metric ISO thread)..:		N/A
	External wiring		N/A
	No soft metal		N/A
(14.4.5)	Corrosion		N/A
(14.4.6)	Nominal diameter of thread (mm)..... :		N/A
	Torque (Nm)..... :		N/A
(14.4.7)	Between metal surfaces		N/A
	Lug terminal		N/A
	Mantle terminal		N/A
	Pull test; pull (N)..... :		N/A
(14.4.8)	Without undue damage		N/A

S

EN 60598-2-4			
Clause	Requirement - Test	Result – Remark	Verdict
	ANNEX 4: SCREWLESS TERMINALS (PART OF THE LUMINAIRE)		N/A
(15)	SCREWLESS TERMINALS		N/A
(15.2)	Type of terminal..... :		N/A
	Rated current (A)..... :		N/A
(15.3.1)	Material		N/A
(15.3.2)	Clamping		N/A
(15.3.3)	Stop		N/A
(15.3.4)	Unprepared conductors		N/A
(15.3.5)	Pressure on insulating material		N/A
(15.3.6)	Clear connection method		N/A
(15.3.7)	Clamping independently		N/A
(15.3.8)	Fixed in position		N/A
(15.3.10)	Conductor size		N/A
	Type of conductor		N/A
(15.5.1)	Terminals internal wiring		N/A
(15.5.1.1)	Pull test spring-type terminals (4 N, 4 samples)		N/A
(15.5.1.2)	Pull test pin or tab terminals (4 N, 4 samples)		N/A
	Insertion force not exceeding 50 N		N/A
(15.5.2)	Permanent connections: pull-off test (20 N)		N/A
(15.6)			N/A
	Voltage drop (mV) after 1 h (4 samples)..... :		N/A
	Voltage drop of two inseparable joints		N/A
	Number of cycles..... :		N/A
	Voltage drop (mV) after 10th alt. 25th cycle (4 samples)..... :		N/A
	Voltage drop (mV) after 50th alt. 100th cycle (4 samples)..... :		N/A
	After ageing, voltage drop (mV) after 10th alt. 25th cycle (4 samples)..... :		N/A
	After ageing, voltage drop (mV) after 50th alt. 100th cycle (4 samples)..... :		N/A
(15.7)	Terminals external wiring		N/A
	Terminal size and rating		N/A
(15.8.1)	Pull test spring-type terminals (4 samples); pull (N)		N/A
	Pull test pin or tab terminals (4 samples); pull (N)		N/A

S

EN 60598-2-4											
Clause	Requirement - Test									Result – Remark	Verdict
(15.9)	Contact resistance test										N/A
	Voltage drop (mV) after 1 h										N/A
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Voltage drop of two inseparable joints										
	Voltage drop after 10th alt. 25th cycle										
	Max. allowed voltage drop (mV) :										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Max. allowed voltage drop (mV) :										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Continued ageing: voltage drop after 10th alt. 25th cycle										
	Max. allowed voltage drop (mV) :										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Continued ageing: voltage drop after 50th alt. 100th cycle										
	Max. allowed voltage drop (mV) :										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											

Appendix 1

Photo Documentation

<p>Photo 1</p> <p>View:</p> <p><input checked="" type="checkbox"/> Front</p> <p><input type="checkbox"/> Rear</p> <p><input type="checkbox"/> Right side</p> <p><input type="checkbox"/> Left side</p> <p><input type="checkbox"/> Top</p> <p><input type="checkbox"/> Bottom</p> <p><input type="checkbox"/> Internal</p>	
--	---

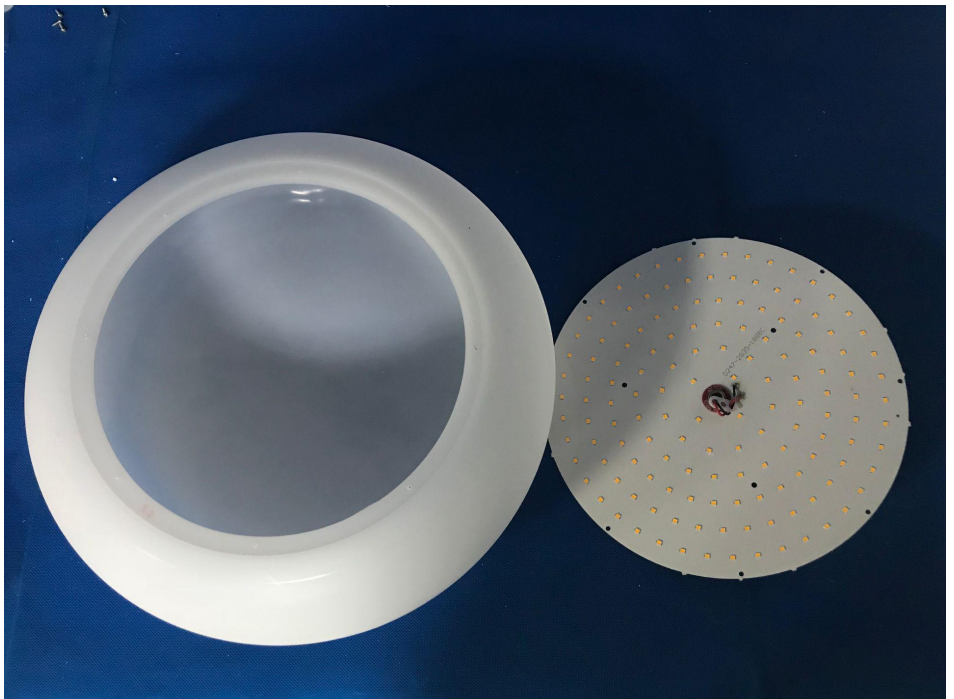
<p>Photo 2</p> <p>View:</p> <p><input type="checkbox"/> Front</p> <p><input type="checkbox"/> Rear</p> <p><input type="checkbox"/> Right side</p> <p><input type="checkbox"/> Left side</p> <p><input type="checkbox"/> Top</p> <p><input type="checkbox"/> Bottom</p> <p><input checked="" type="checkbox"/> Internal</p>	
--	--

Photo 3

View:

- Front
- Rear
- Right side
- Left side
- Top
- Bottom
- Internal



Photo 4

View:

- Front
- Rear
- Right side
- Left side
- Top
- Bottom
- Internal



---END---