


V-TAC[®]

INNOVATIVE LED LIGHTING

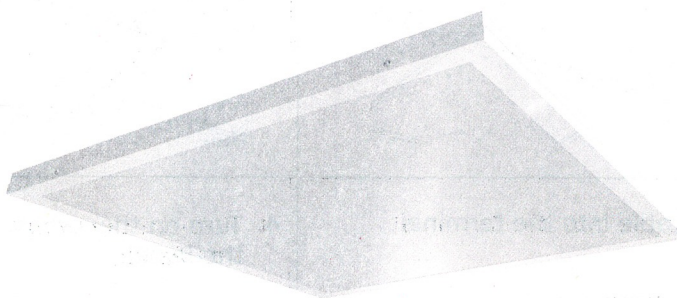
INSTALLATION DIAGRAM:

WEEE Number: 80133970

LED PANEL LIGHT CCT with Toggle Switch



2 YEARS
WARRANTY*



Color changing



Toggle switch

Model	Watts	Lumens	BeamAngle	PF	CRI	Body Type	Operation Temperature	Input Power	Dimension
VT-6240	40	3200	120	>0.9	>80	FE+PP	-20°C to +40°C	AC:200-240V, 50/60Hz	595x595x29mm

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installing and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

WARNING!

1. Please make sure to turn off the power before starting the installation.
2. The light source of this luminaire is not replaceable, when the light source reaches its end of life the whole luminaire should be replaced.
3. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
4. Install only by certified Electrician.



This marking indicates that this product should not be disposed of with other household wastes.



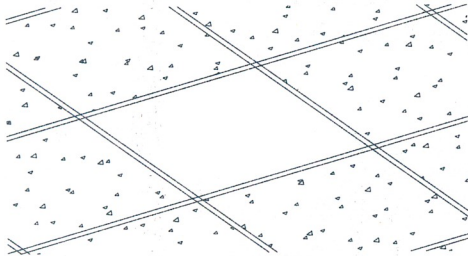
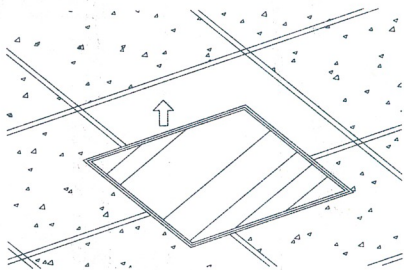
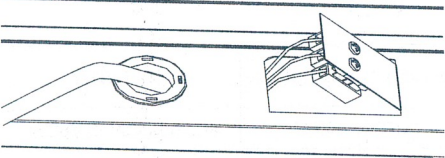
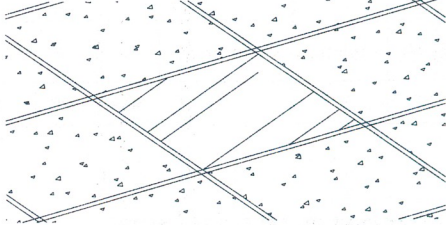
Caution, risk of electric shock.

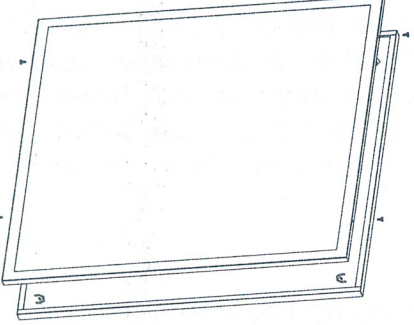
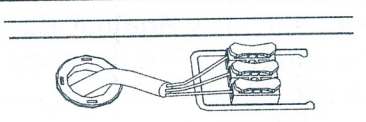
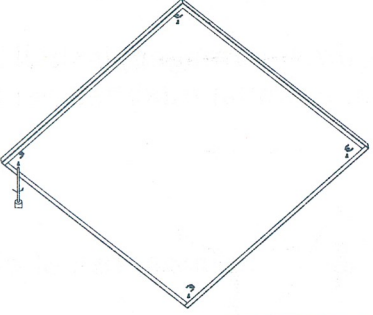
RECESSED INSTALLATION

1. Make a hole into the ceiling.
2. Fix the panel into the ceiling.
3. Connect the cable into the terminal.
4. Turn on the switch and test the panel.

SURFACE INSTALLATION

1. Remove the cover as shown below.
2. Connect the cable into the terminal.
3. Fix the panel onto the ceiling.
4. Fix the cover and test the fixture light.

Installation for Recessed	
<p>1. Make a hole into the ceiling</p> 	<p>2. Fix the Panel into the Ceiling</p> 
<p>3. Connect the cable into the terminal</p>  <p>binding post</p> <p>AC200~240V</p> <p>L ⊕ N</p>	<p>4. Turn on the switch and test the Panel</p> 

Installation for Surface	
<p>1. Remove the cover as shown below.</p> 	<p>2. Connect the cable into the terminal.</p>  <p>binding post</p> <p>AC200~240V</p> <p>L ⊕ N</p>
<p>3. Fix the panel onto the ceiling.</p> 	<p>4. Fix the cover and test the fixture light</p> 